

AUTOMATIC STARTER & CHARGER

Part Number: HILT9510

HILTA
GARAGE EQUIPMENT

HILTA Automatic Starter Charger: 12 & 24 volt

- Choose from 3 charging outputs
- Zero sparking system
- Easy-to-use digital control panel
- Intelligent microprocessor technology


- ✓ **Charge all battery types:** Select the charging curve for the battery type for Liquid/Standard, Gel, AGM deep cycle.
- ✓ **3 Different charging outputs:** Quick Charge **60amp**, Mid-Charge **20amp** and Trickle Charge **5amp**.
- ✓ **Charge to 100% safely:** The advanced multi-staged charger does not require supervision or the battery to be removed from the vehicle whilst charging to 100%. Float mode will be activated at the end of a complete charge, keeping the battery at 100%.
- ✓ **Protection for the vehicle electronics:** No need to disconnect the battery from the vehicle. No risks of sparks, there is no voltage to the clamps when they are not connected to a battery.
- ✓ **Instant 12V smart start:** Will automatically detect damaged or badly sulphated batteries. To protect the vehicle electronics the charger will not deliver current.
- ✓ **9-stage intelligent charging:** The device permanently analyses the health of the battery and automatically adjusts the output voltage. The voltage and the percentage are displayed in real time on the digital screen.
- ✓ **Charging a deeply discharged battery:** Batteries discharged as low as 1V can be revived to full capacity. This is not possible if the battery is too damaged.
- ✓ **Full protection:** Reverse polarity connection, short circuit, overload and high protection.
- ✓ **Heavy duty:** Welding grade industrial cables and clamps (1.9m)

Microprocessor Technology



Includes:

- Welding grade cables 1.9m
- Insulated clamps

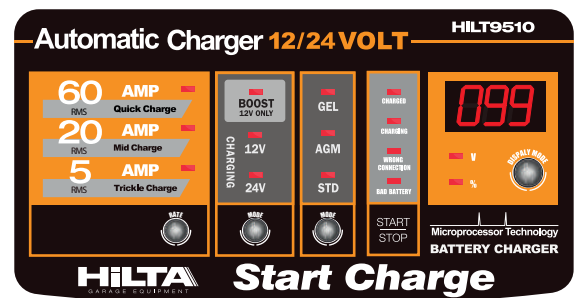

FEATURES					cm						
50/60hz	AMP	⚡	BATTERY	MIN. Ah	MAX. Ah	FUSE	CE	GUARANTEE	↑	↓	KG
230V	16A	1700W	12V	20-600Ah	200A	✓	12 months	H: 88 W: 35 D: 28	H: 98 W: 38 D: 33	19.2	
			24V	20-450Ah							

CE EN

Manufactured in PRC

HILTA
GARAGE EQUIPMENT